

Primary/Input: 347V, 60Hz, 53W, 0.15A @ Full/Rated Load.

Secondary/Output:

- Open Circuit= 240V $\pm 2\%$, 0.3W
- Full/Rated Load= 225V $\pm 2\%$, 50VA (50W/0.22A resistive load)

DC Resistance

- Primary (white-red): 480 ohms nominal.
- Secondary (white-black): 420 ohms nominal.

Dielectric Strength: Winding to Core 3000V, 60Hz, 1 sec.

Load Regulation: 6.5% typ.

Efficiency: 94% typ. @ 347Vin, 50VA load.

Insulation System: UL Recognized for Class B (130°C). Environmental Temperature Rating: -40°C to +50°C.


Surface Temperature (typ): 56°C @ 25°C Ambient.

MTBF (based on MIL Handbook 217F): Min 50 yrs @ rated specification.







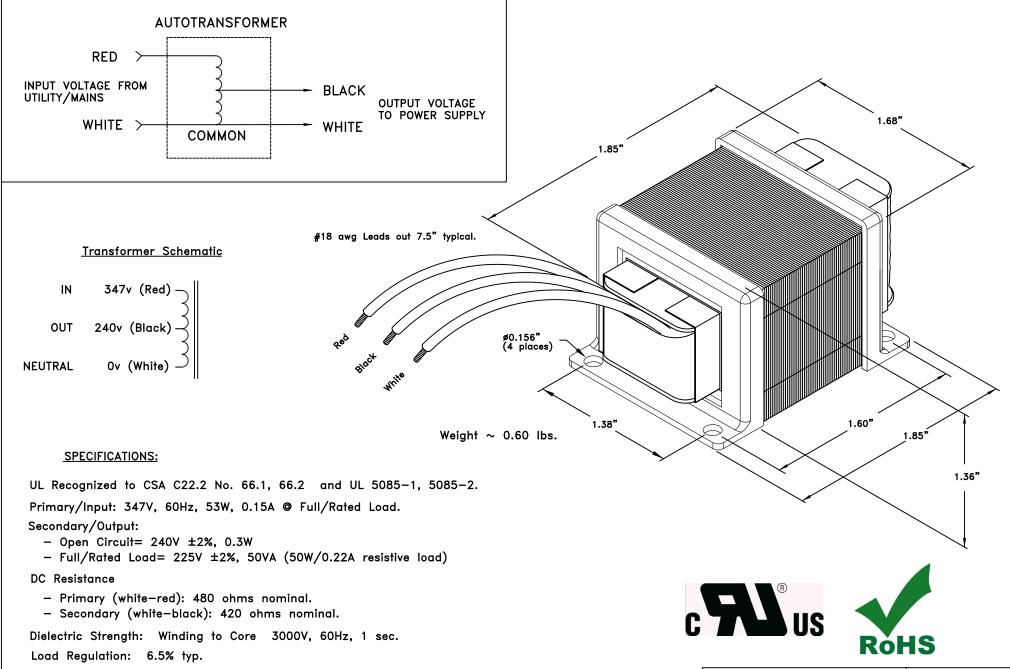

Efficiency: 94% typ. @ 347Vin, 50VA load.

Insulation System: UL Recognized for Class B (130°C)

MTBF (based on MIL Handbook 217F): Min 50 yrs @ rated specification.

Environmental Temperature Rating: −40°C to +50°C. Surface Temperature (typ): 56°C @ 25°C Ambient.



SPECIFICATIONS:

UL Listed to CSA C22.2 No. 66.1, 66.2 and UL5085-1, UL5085-2.

Primary/Input: 347V, 60Hz, 53W, 0.15A @ Full/Rated Load.

Secondary/Output:

- Open Circuit= 240V ±2%, 0.3W
- Full/Rated Load= 225V ±2%, 50VA (50W/0.22A resistive load)

DC Resistance

- Primary (white-red): 480 ohms nominal.
- Secondary (white-black): 420 ohms nominal.

Dielectric Strength: Winding to Core 3000V, 60Hz, 1 sec.

Load Regulation: 6.5% typ.

Efficiency: 94% typ. @ 347Vin, 50VA load.

Insulation System: Class B (130°C).


Environmental Temperature Rating: -40°C to +60°C.


Surface Temperature (typ): 54°C @ 25°C Ambient, Full load.

MTBF (based on MIL Handbook 217F): Min 50 yrs @ rated specification.

Housing- Black Zytel FR50 (plastic)

Suitable for IP66 rated applications.

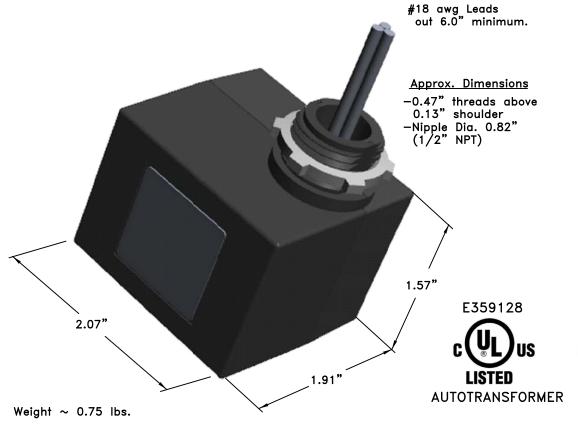

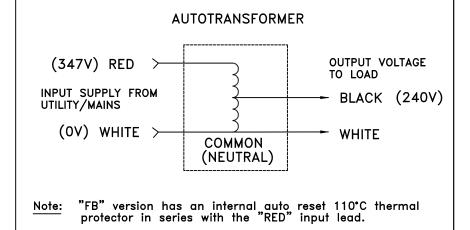

INSTALLATION INSTRUCTIONS:

<u>Mechanical:</u> This transformer is typically used for external assembly to a fixture enclosure.

"EB" version does not have an internal fuse.

- Remove the metal lock-nut from the threaded nipple.
- Insert the threaded nipple and the lead—wires through a hole or standard knock—out in the fixture enclosure.
- Secure the transformer inside of the enclosure using the lock-nut on the threaded nipple; hand tighten.
- Note: Take care not to over-tighten the lock-nut to avoid damage to the housing.

<u>Electrical:</u> Connect the Red/White leads to the Supply and the Black/White leads to the Load per the AUTOTRANSFOMER drawing above.

 Note that the "White" lead is the Neutral and is common to both the Input Supply and Output to Load.



210041EB & 210041FB OUTLINE DRAWING

electronic

craftsmen